






ElectroOnline Ddq / Maq

OPERATING INSTRUCTION

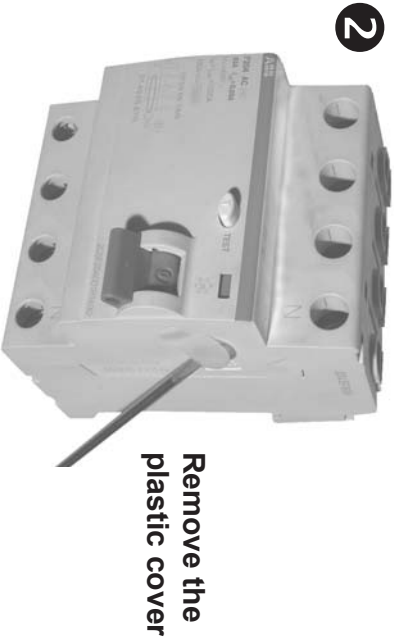

Remove the plastic cover

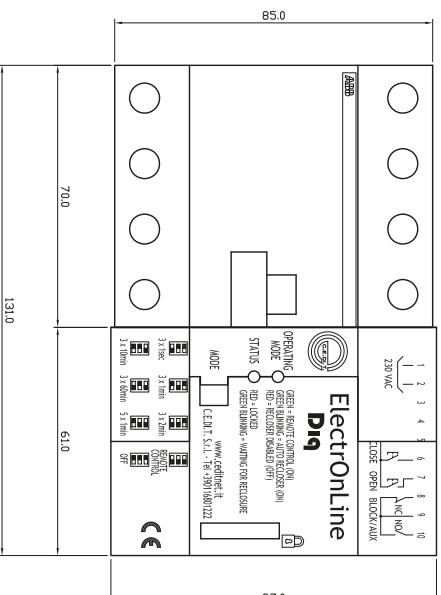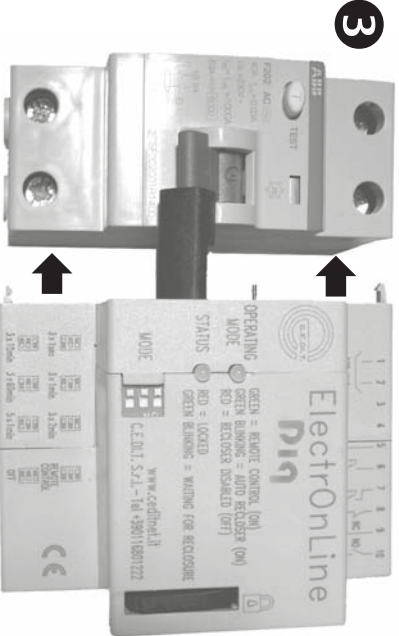

RECLOSEURE SEQUENCE	TIME DELAY RECLOSING	TIME DELAY OF ZERO SETTING COUNTER
	3 x 1 sec	after 20 sec
	3 x 1 min	after 20 sec
	3 x 2 min	after 20 sec
	3 x 10 min	after 20 sec
	3 x 60 min	after 20 sec
	5 x 1 min	after 20 sec

TECHNICAL CHARACTERISTICS

Power Supply (terminals 1-2)	230 V AC -15% +15% (50-60 Hz)
Power consumption	< 4 W
Frequency of reclosures	max 120 operation/h
Operating temperature	- 20 ... + 55°C
Operating time at ambient temperature	< 1 sec
Make-time at ambient temperature	< 1 sec
Cables cross-section	< 2,5 mmq
Signal contact block (terminals 8-9-10)	1 NO + 1 NC
Rated current	2A
Maximum switching voltage	250V AC
Maximum switching capacity	60VA
Auxiliary input	Terminals 5-6-7 = Remote control

LEDS	GREEN	BLINK GREEN	RED
OPERATING MODE	Remote Control (ON)	Auto Recloser (ON)	Recloser Disabled (OFF)
STATUS		Waiting for Reclosure	Locked (Max Reclosure)



C.E.D.I.T. S.r.l.
Via A. Volta 40, 10040 Druento (TO), Italy
Tel +39.011.680.1222 Fax +39.011.627.2190
www.ceditnet.it - e-mail: info@ceditnet.it